



Model #SUS033-V


1/3 HP Stainless Steel Housing-Cast Iron Base Sump Pump



Features & Benefits:

- ❖ Stainless steel motor shell with durable cast iron volute.
- ❖ Oil-filled permanent split capacitor motor.
- ❖ Built-in automatic thermal overload protector.
- ❖ Vertical float switch for automatic operation.
- ❖ 1 ½ " discharge.
- ❖ Sturdy pump base prevent clogs and prevents pump from moving around in the pit.
- ❖ 8ft power cord.
- ❖ 3 year warranty.

Inlet	Diameter 18 inches
Discharge	NPT1/1/2
Pump Cover	HT200
Motor Housing	304
Pump Body	HT200
Switch Type	/(optional)
Impeller	PP-GF40
Seal Design	Framework oil seal
Seal Material	NBR
Oil Filled Motor	Yes
Power Cord	SJTW 18AWG 10ft
Net Weight	21.4
Gross Weight	23.6
Package Size	9.85×8.3×13.2
Expected Life Cycle	4000 Hours
Motor Wires	Copper
Self-Priming	/
Certification	CSA

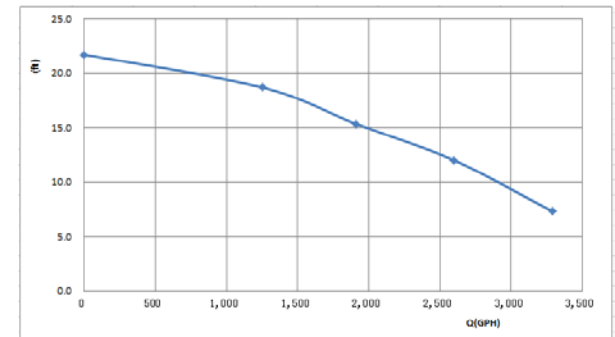

Model	HP	Voltage	AMP	Discharge NPT(In)	GPH of water @ Total Ft. of Head					Max.Head Ft
					5 ft	10 ft	15 ft	20 ft	25 ft	
SUS033-V	1/3	115	4.5	1-1/2	3650	2950	2100			22