



Model #SUS050-V


## 1/2 HP Stainless Steel Housing-Cast Iron Base Sump Pump



|                     |                    |
|---------------------|--------------------|
| Inlet               | Diameter 18 inches |
| Discharge           | NPT1/1/2           |
| Pump Cover          | HT200              |
| Motor Housing       | 304                |
| Pump Body           | HT200              |
| Switch Type         | SJE VMII vertical  |
| Impeller            | PP-GF40            |
| Seal Design         | Framework oil seal |
| Seal Material       | NBR                |
| Oil Filled Motor    | Yes                |
| Power Cord          | SJTW 18AWG 10ft    |
| Net Weight          | 21.4               |
| Gross Weight        | 23.6               |
| Package Size        | 11*8.3*15.2        |
| Expected Life Cycle | 4000 Hours         |
| Motor Wires         | Copper             |
| Self-Priming        | /                  |
| Certification       | CSA                |

### Features & Benefits:

- ❖ Stainless steel motor shell with durable cast iron volute.
- ❖ Oil-filled permanent split capacitor motor.
- ❖ Built-in automatic thermal overload protector.
- ❖ Vertical float switch for automatic operation.
- ❖ 1 ½ " discharge.
- ❖ Sturdy pump base prevent clogs and prevents pump from moving around in the pit.
- ❖ 8ft power cord.
- ❖ 3 year warranty.

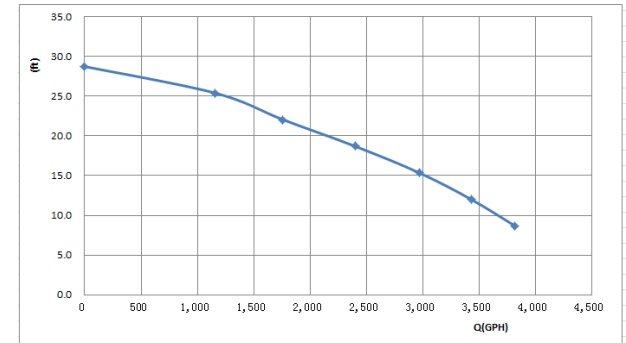

| Model           | HP  | Voltage | AMP | Discharge NPT(In) | GPH of water @ Total Ft. of Head |       |       |       |       | Max.Head Ft |
|-----------------|-----|---------|-----|-------------------|----------------------------------|-------|-------|-------|-------|-------------|
|                 |     |         |     |                   | 5 ft                             | 10 ft | 15 ft | 20 ft | 25 ft |             |
| <b>SUS050-V</b> | 1/2 | 115     | 5   | 1-1/2             | 4300                             | 3750  | 3050  | 2250  |       | 29          |