




UltraMB™ Model MBNL

Lead Free Globe Style Balancing Valve

(1/2", 3/4", 1")

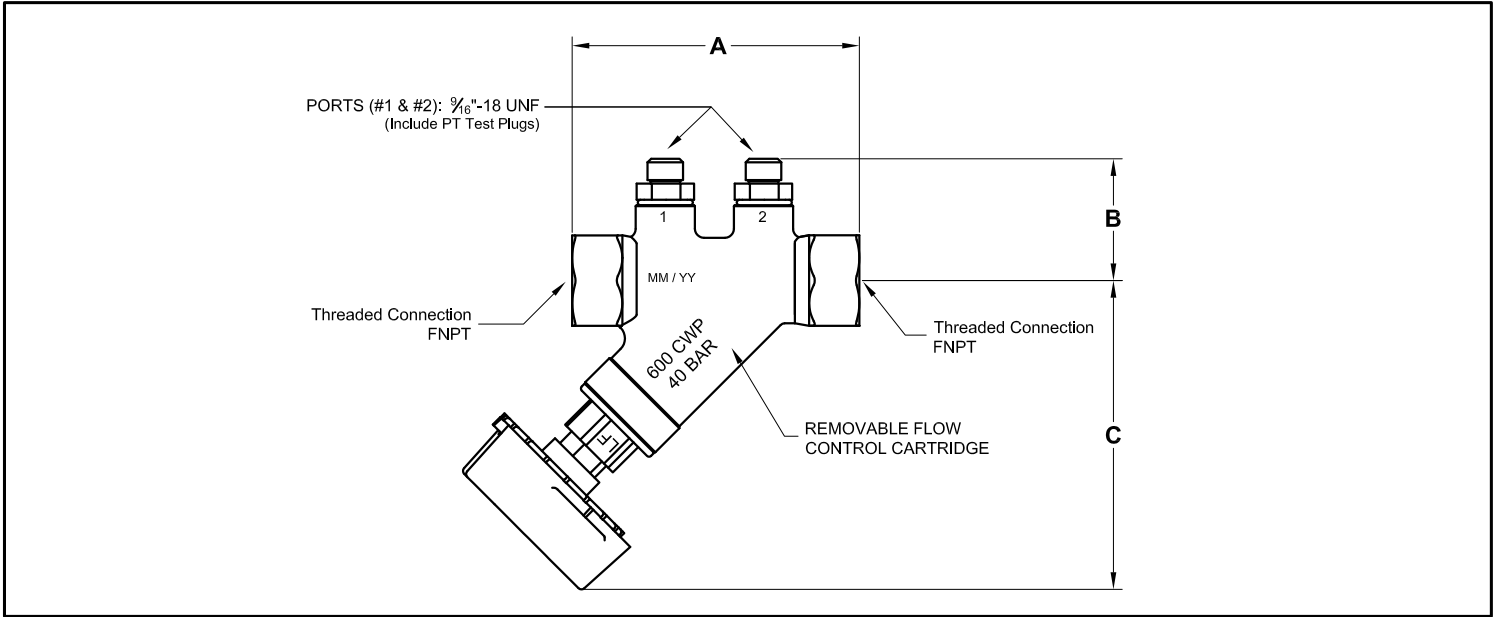




DIMENSIONS [inches]					
SIZE [inches]	Threaded Connections FNPT	A	B	C	WT ¹ [lbs]
1/2	1/2" x 1/2"	3.48	1.55	3.60	1.31
3/4	3/4" x 3/4"	4.00	1.69	4.30	1.93
1	1" x 1"	4.63	1.69	4.30	2.16

¹Globe, Handle, and PT's included

FLOW RATE RECOMMENDATION GUIDE			
SIZE [inches]	IDEAL FLOW RANGES [gpm]		Handwheel Turns
	Min.	Max.	Max.
1/2	0.25	16.00	7.5
3/4	0.55	17.00	10
1	0.55	17.00	10

MATERIALS & DESIGN DATA	
BODY, CAPLEAD FREE BRASS C46500, 600 WOG, 325°F
CAP SEALFKM O-RING
BALANCING GLOBELEAD FREE BRASS C46500
HANDLENYLON, GLASS-FILLED
ACCURACY±5%

ACCESSORIES			
	Order Code	Part No.	Description
	<input type="checkbox"/> E ES-MTV.	EXTENSION 3" O.A.L.
	<input type="checkbox"/> H HT.	HANGING TAG with Model No., Location, Flow Rate (Maximum 7 Characters)
	<input type="checkbox"/> X PTE.	PRES / TEMP TEST PLUG EXTENSION 1 1/16" O.A.L.

ORDER DATA

Sample Part #: **MBNL-075F-PP-EXH**

Model _____

Size & Connection _____

Port Accessories _____

PT Cap Option _____

Option Order Codes _____

Please consult the "Ordering Guide" section in Nexus Valve Catalog for complete part number and ordering information.

PROJECT _____

CONTRACTOR _____

PO/JOB NO. _____

ENGINEER _____

REPRESENTATIVE _____

DATE _____



UltraMB™ Model MBNL is tested and certified to NSF/ANSI 61 & NSF/ANSI 372 for Lead Free compliance.

9982 E. 121st Street, Fishers, IN 46037
Copyright © 2015 Nexus Valve, Inc. All Rights Reserved

(Rev: 03/03/17)