fluid Innovative fixtures for life SPECIFICATIONS

Specifications

- Brass construction for durability and reliability
- High quality ceramic cartridge ensures life long . trouble free service
- Single lever handle operation allows both volume . and temperature control
- Max-temperature limit stop for added safety. .
- SSi Eco-Care swivel aerator 1.2 gpm (4.6 lpm) at 60 . psi
- Extra long flexible connection for easy installation
- Single-hole mounting with a supplied wrench tool
- 1-1/2" faucet hole size for drilling recommended
- Includes guick clean waste pop-up drain .

Finish

- CP (Polished Chrome) .
- **BN (PVD Brushed Nickel)**

Codes and Standards

- ANSI/ASME A112.18.1
- CSA B125.1 .
- NSF61-9
- ADA .
- IAPMO / cUPC Listed
- . **EPA** Watersense Listed
- AB1953 California Lead Plumbing Law Certified .

Warranty

Limited Lifetime Faucet Warranty against material and manufacturing defects for residential use.

11/16"


2 Year Limited Warranty on all industrial,

µ⁹∕16' [40mm] Customer Service: 1-800-460-7019 www.fluidfaucets.com

fluid Citi Series **Single Lever Lavatory Faucet Model: F24013**





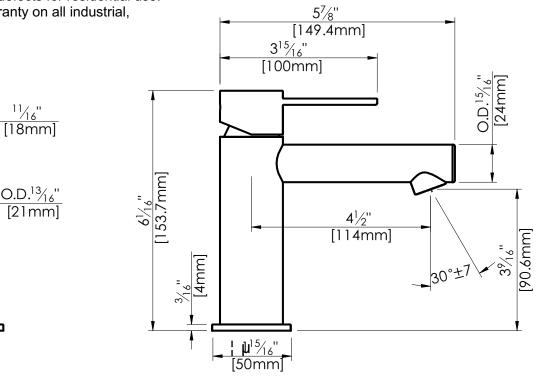

Sustainable Solutions